
Transformer 1:1 transmission line balun 5 to 3000 MHz

Features


- Surface Mount
- 1:1 Impedance
- Excellent MoCA band performance
- Excellent amplitude and phase balance
- Can be used in both 50Ω and 75Ω systems
- 260°C Reflow Compatible
- RoHS* Compliant, Pb Free
- Available on Tape and Reel.

Description

MABA-007871-CT1A40 is a 1:1 RF Transmission Line step up transformer in a low cost, surface mount package. Ideally suited for MoCA band applications.



Schematic



Pin Configuration

| Pin No. | Function | |
|---------|--------------------------|--|
| 1 | Secondary Dot (Output 1) | |
| 2 | Not used (Ground) | |
| 3 | Secondary (Output 2) | |
| 4 | Primary (Ground) | |
| 6 | Primary Dot (Input) | |

Ordering Information¹

| Part Number | Package |
|--------------------|---------------------|
| MABA-007871-CT1A40 | 2000 piece reel |
| MABA-007871-CT1ATB | Customer Test Board |

1. Reference Application Note M513 for reel size information.

* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.

MACOM

Rev. V6

¹



Transformer 1:1 transmission line balun 5 to 3000 MHz

Rev. V6

Electrical Specifications: $T_A = 25^{\circ}C$, $Z_0 = 50 \Omega$

| Parameter | Test Conditions | Units | Min | Тур | Мах |
|--------------------------------------|--|-------|--------------------------|--------------------------------------|--------------------------------------|
| Insertion Loss | 5 - 50 MHz 50 - 975 MHz 975 - 1525 MHz 1525 - 2150 MHz 2150 - 3000 MHz | dB | _ | 0.35 0.4 0.3 0.65 2.5 | 2.50 0.60 1.00 2.30 6.00 |
| Input Return Loss | 5 - 50 MHz 50 - 975 MHz 975 - 1525 MHz 1525 - 2150 MHz 2150 - 3000 MHz | dB | 12 15 13 6 3 | 28 23 21 12 6 | _ |
| Amplitude Unbalance (Nominal 0dB) | 5 - 50 MHz 50 - 975 MHz 975 - 1525 MHz 1525 - 2150 MHz 2150 - 3000 MHz | dB | | 0.45 0.15 0.15 0.38 0.05 | ±3.8 ±0.7 ±0.7 ±0.9 1.6 |
| Phase Unbalance (Nominal 180°) | 5 - 50 MHz 50 - 975 MHz 975 - 1525 MHz 1525 - 2150 MHz 2150 - 3000 MHz | o | | 6.5 0.1 0.1 3 13 | ±50 ±5 ±4 ±12 35 |


Temperature data available on request


Absolute Maximum Ratings

| Parameter | Absolute Maximum | | |
|-----------------------|------------------|--|--|
| Max Input Power | 250 mW | | |
| DC current | 200 mA | | |
| Operating Temperature | -40°C to +105°C | | |
| Storage Temperature | -40°C to +85°C | | |

Transformer 1:1 transmission line balun 5 to 3000 MHz


Typical Performance Curves: $T_A = 25^{\circ}C$, $Z_0 = 50 \Omega$

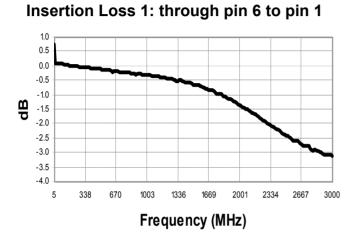

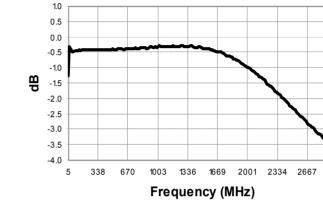


Insertion Loss 2: coupled pin 6 to pin 3




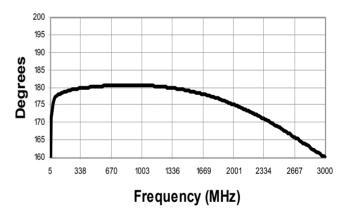

Amplitude Balance

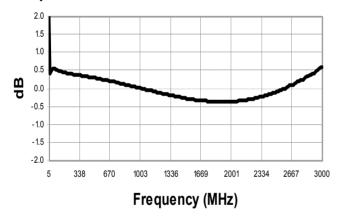

Input Return Loss

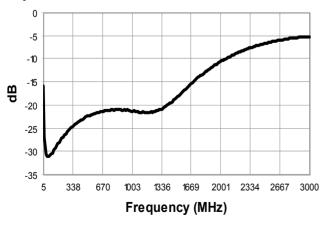

3

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.


MACOM

Rev. V6


3000

Transformer 1:1 transmission line balun 5 to 3000 MHz

Case Style:

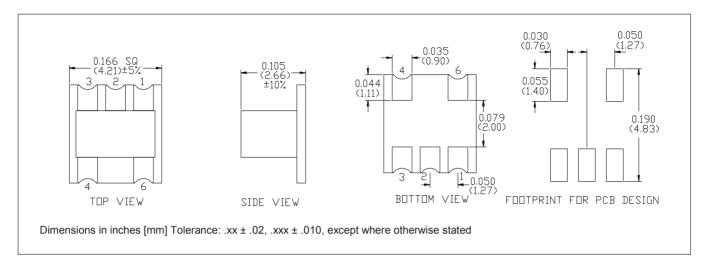

Tape & Reel Information

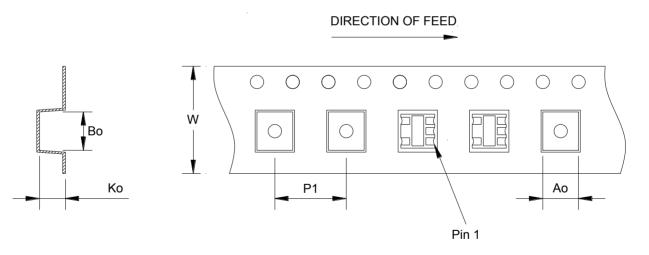

| ltem | Dimension | | |
|------|-------------------|--|--|
| Ao | 4.50mm +/- 0.1mm | | |
| Во | 4.50mm +/- 0.1mm | | |
| Ко | 2.73mm +/- 0.1mm | | |
| W | 12.00mm +/- 0.3mm | | |
| P1 | 8.00mm +/- 0.1mm | | |

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.

4

MACOM

Rev. V6

Transformer 1:1 transmission line balun 5 to 3000 MHz



Rev. V6

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

⁵

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

MACOM: MABA-007871-CT1A40