



800A101JT250X
AMERICAN TECHNICAL CERAMICS

[Buy Now](#)



Looking for a discount?

[Check out our current promotions!](#)

Give us a call

1-855-837-4225

International: 1-415-281-3866

Email Us

Sales and New Orders: sales@verical.com

Order Support: support@verical.com

Suppliers: [Visit our seller page](#)

Company Address

Arrow Electronics, Inc
9201 East Dry Creek Road
Centennial, CO 80112

ATC 800 A Series NPO Ceramic, High RF Power Ultra-Low ESR Multilayer Capacitors

- Case A Size (.055" x .055")
- Rugged, reliable NPO dielectric
- Case optimized for highest self resonant
- Capacitance Range 0.1 pF to 100 pF
- Lowest ESR
- Capable of highest RF Power
- RoHS Compliant / Lead Free frequency

ATC's 800 A Series offers superb performance in demanding high RF power applications requiring consistent and reliable operation. The combination of highly conductive metal electrode systems, optimized case geometries, and proprietary dielectrics, yields the lowest ESR. ATC's new NPO low loss rugged dielectrics are designed to provide superior heat transfer in high RF power applications. Ultra-low ESR and superior thermal performance insure that the 800 A Series products are your best choice for high RF power applications from UHF through microwave frequencies.

Typical applications: UHF and Microwave Communications Systems, Wireless Communications, Public Safety Radio, Telecom, WiMAX, and Satellite Systems.

Typical circuit applications: High RF Power Filter Networks, Combiners, Couplers, Matching Networks, Output Coupling, Antenna Coupling, and DC Blocking and Bypassing.

ENVIRONMENTAL TESTS

ATC 800 A Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A

MOISTURE RESISTANCE:


MIL-STD-202, Method 106

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C 200% WVDC applied

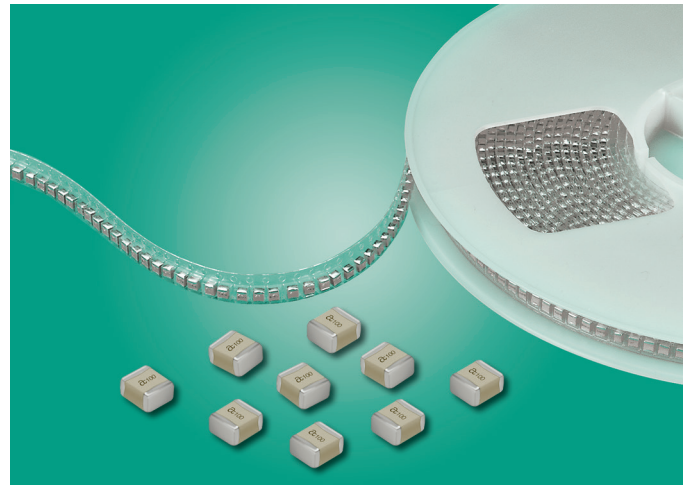

ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q): > 2000 @ 1 MHz

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

0 ±30 PPM/°C (-55°C to +125°C)

INSULATION RESISTANCE (IR):

0.1 pF to 100 pF:

10⁵ Megohms min. @ +25°C at rated WVDC

10⁴ Megohms min. @ +125°C at rated WVDC

WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

Case A: 250% of rated WVDC for 5 secs. (625 VDC)

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS:

None
(No capacitance variation with voltage or pressure)

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater

OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage)

TERMINATION STYLE:

RoHS Compliant and Solder Plate
See Mechanical Configurations, page 3

TERMINAL STRENGTH: Terminations for chips withstand a pull of 5 lbs. min., 10 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



AMERICAN

ATC North America
sales@atceramics.com

TECHNICAL

ATC Europe
saleseur@atceramics.com

CERAMICS

ATC Asia
sales@atceramics-asia.com

 **THE ENGINEERS' CHOICE®**
ISO 9001 REGISTERED COMPANY

THE ENGINEERS' CHOICE®

www.atceramics.com

ATC # 001-1032 Rev. K, 7/20

ATC 800 A Capacitance Values


| CAP. CODE | CAP. (pF) | TOL. | RATED WVDC | CAP. CODE | CAP. (pF) | TOL. | RATED WVDC | CAP. CODE | CAP. (pF) | TOL. | RATED WVDC |
|-----------|-----------|---------------|------------|-----------|-----------|---------|------------|-----------|-----------|---------------|------------|
| OR1 | 0.1 | B | 250 | 2R2 | 2.2 | B, C, D | 250 | 160 | 16 | F, G, J, K, M | 250 |
| OR2 | 0.2 | B, C | | 2R4 | 2.4 | | | 180 | 18 | | |
| OR3 | 0.3 | | | B, C, D | 2R7 | | | 2.7 | 200 | | |
| OR4 | 0.4 | 3R0 | | | 3.0 | | | 220 | 22 | | |
| OR5 | 0.5 | 3R3 | | | 3.3 | | | 240 | 24 | | |
| OR6 | 0.6 | 3R6 | | | 3.6 | | | 270 | 27 | | |
| OR7 | 0.7 | 3R9 | | | 3.9 | | | 300 | 30 | | |
| OR8 | 0.8 | 4R3 | | | 4.3 | | | 330 | 33 | | |
| OR9 | 0.9 | 4R7 | | | 4.7 | | | 360 | 36 | | |
| 1R0 | 1.0 | 5R1 | | | 5.1 | | | 390 | 39 | | |
| 1R1 | 1.1 | 5R6 | | | 5.6 | 430 | | 43 | | | |
| 1R2 | 1.2 | 6R2 | | | 6.2 | 470 | | 47 | | | |
| 1R3 | 1.3 | B, C, J, K, M | | 6R8 | 6.8 | 510 | | 51 | | | |
| 1R4 | 1.4 | | | 7R5 | 7.5 | 560 | | 56 | | | |
| 1R5 | 1.5 | | | 8R2 | 8.2 | 620 | | 62 | | | |
| 1R6 | 1.6 | F, G, J, K, M | | 9R1 | 9.1 | 680 | | 68 | | | |
| 1R7 | 1.7 | | | 100 | 10 | 750 | | 75 | | | |
| 1R8 | 1.8 | | | 110 | 11 | 820 | | 82 | | | |
| 1R9 | 1.9 | | | 120 | 12 | 910 | | 91 | | | |
| 2R0 | 2.0 | | | 130 | 13 | 101 | | 100 | | | |
| 2R1 | 2.1 | | | 150 | 15 | | | | | | |

VRMS = 0.707 X WVDC

SPECIAL VALUES, TOLERANCES AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.

| CAPACITANCE TOLERANCE | | | | | | | | |
|-----------------------|---------|----------|---------|-----|-----|-----|------|------|
| Code | B | C | D | F | G | J | K | M |
| Tol. | ±0.1 pF | ±0.25 pF | ±0.5 pF | ±1% | ±2% | ±5% | ±10% | ±20% |

ATC PART NUMBER CODE

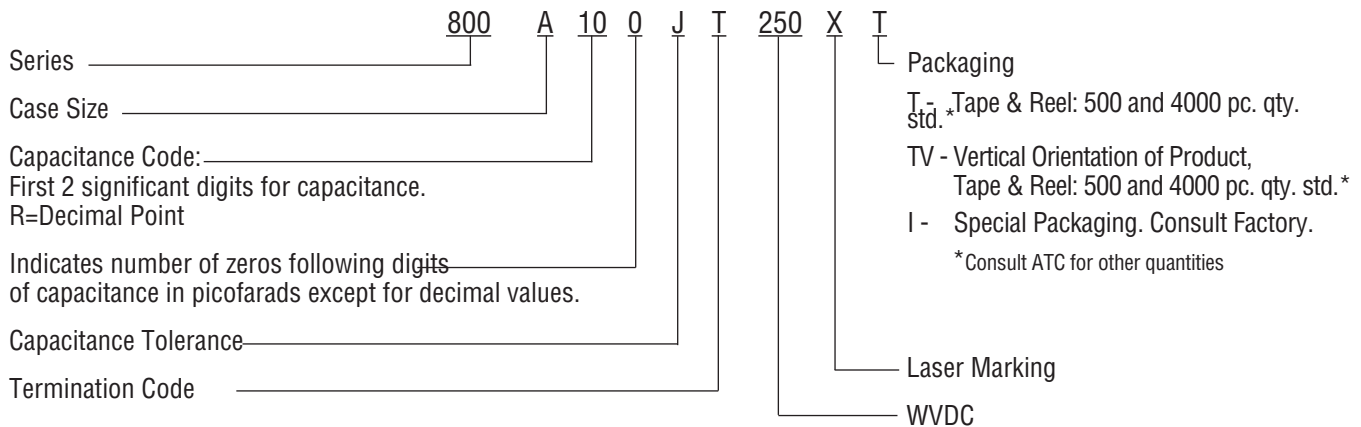

The above part number refers to a 800 A Series (case size A) 10 pF capacitor, J tolerance (±5%), 150 WVDC, with T termination (Tin Plated over Nickel Barrier, RoHS Compliant), laser marking and tape and reel packaging.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.





A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com



ATC Europe
saleseur@atceramics.com

ATC Asia
sales@atceramics-asia.com


ATC 800 A Capacitors: Mechanical Configurations

| ATC SERIES & CASE SIZE | ATC TERM. CODE | CASE SIZE & TYPE | OUTLINES W/T IS A TERMINATION SURFACE | BODY DIMENSIONS Inches (mm) | | | LEAD AND TERMINATION DIMENSIONS AND MATERIALS | |
|------------------------|----------------|---|---|--|----------------------------|---------------------|---|--|
| | | | | LENGTH (L) | WIDTH (W) | THICKNESS (T) | OVERLAP (Y) | MATERIAL |
| 800A | T | A  Solderable Nickel Barrier |  | .055 +.015 -.010 (1.40 +0.38 -0.25) | .055 ±.015 (1.40 ±0.38) | .057 (1.45) max. | .010 +.010 -.005 (0.25 +0.25 -0.13) | RoHS Compliant Tin Plated over Nickel Barrier Termination |
| 800A | W | A  Solder Plate |  | .055 +.015 -.010 (1.40 +0.38 -0.25) | .055 ±.015 (1.40 ±0.38) | .057 (1.45) max. | .010 +.010 -.005 (0.25 +0.25 -0.13) | Tin/Lead Solder Plated over Nickel Barrier Termination |

ATC 800 A Non-Magnetic Capacitors: Mechanical Configurations

| ATC SERIES & CASE SIZE | ATC TERM. CODE | CASE SIZE & TYPE | OUTLINES W/T IS A TERMINATION SURFACE | BODY DIMENSIONS Inches (mm) | | | LEAD AND TERMINATION DIMENSIONS AND MATERIALS | |
|------------------------|----------------|--|--|--|----------------------------|---------------------|---|--|
| | | | | LENGTH (L) | WIDTH (W) | THICKNESS (T) | OVERLAP (Y) | MATERIAL |
| 800A | TN | A  Non-Mag Solderable Barrier |  | .055 +.015 -.010 (1.40 +0.38 -0.25) | .055 ±.015 (1.40 ±0.38) | .057 (1.45) max. | .010 +.010 -.005 (0.25 +0.25 -0.13) | RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination |

Suggested Mounting Pad Dimensions

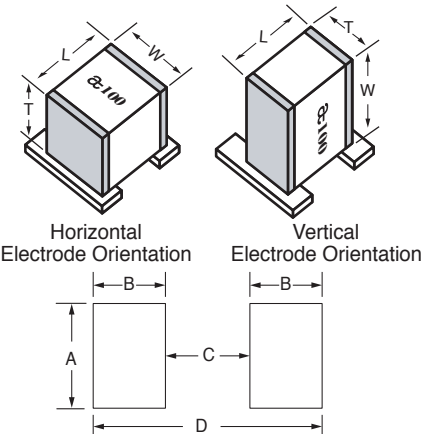

Horizontal Electrode Orientation



Vertical Electrode Orientation

Case A

| | Pad Size | A Min. | B Min. | C Min. | D Min. |
|------------------|--------------|--------|--------|--------|--------|
| Vertical Mount | Normal | .070 | .050 | .030 | .130 |
| | High Density | .050 | .030 | .030 | .090 |
| Horizontal Mount | Normal | .080 | .050 | .030 | .130 |
| | High Density | .060 | .030 | .030 | .090 |

Dimensions are in inches.

ATC 800 A Performance Data

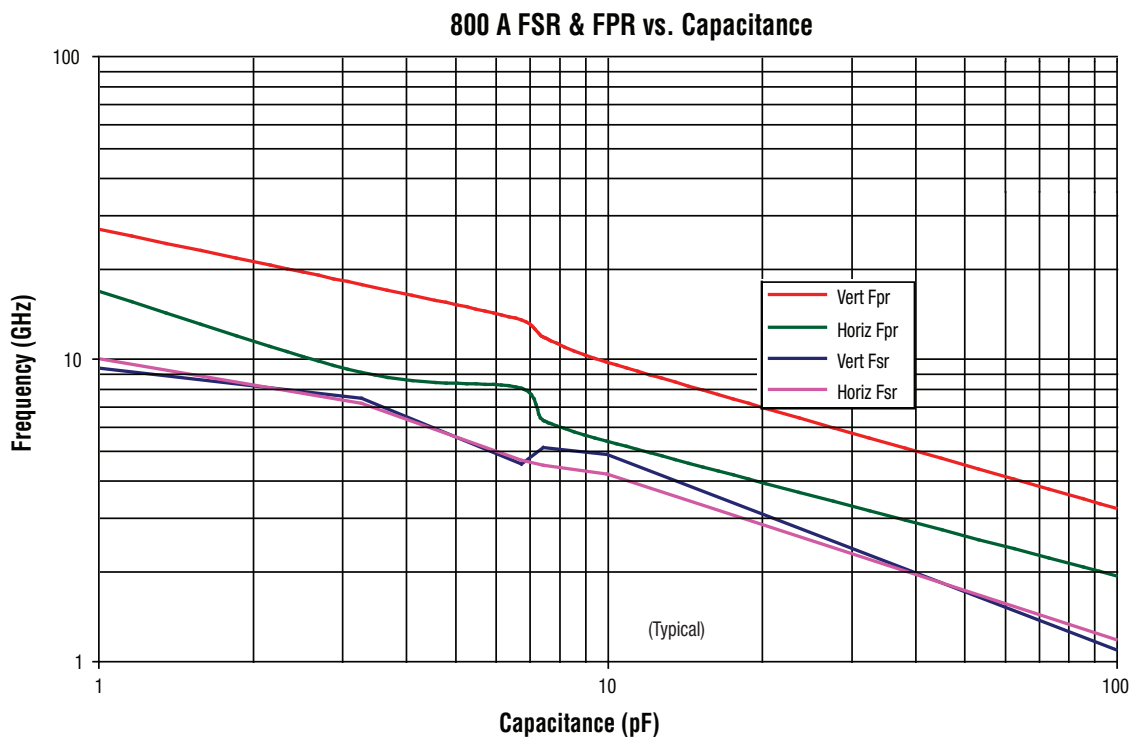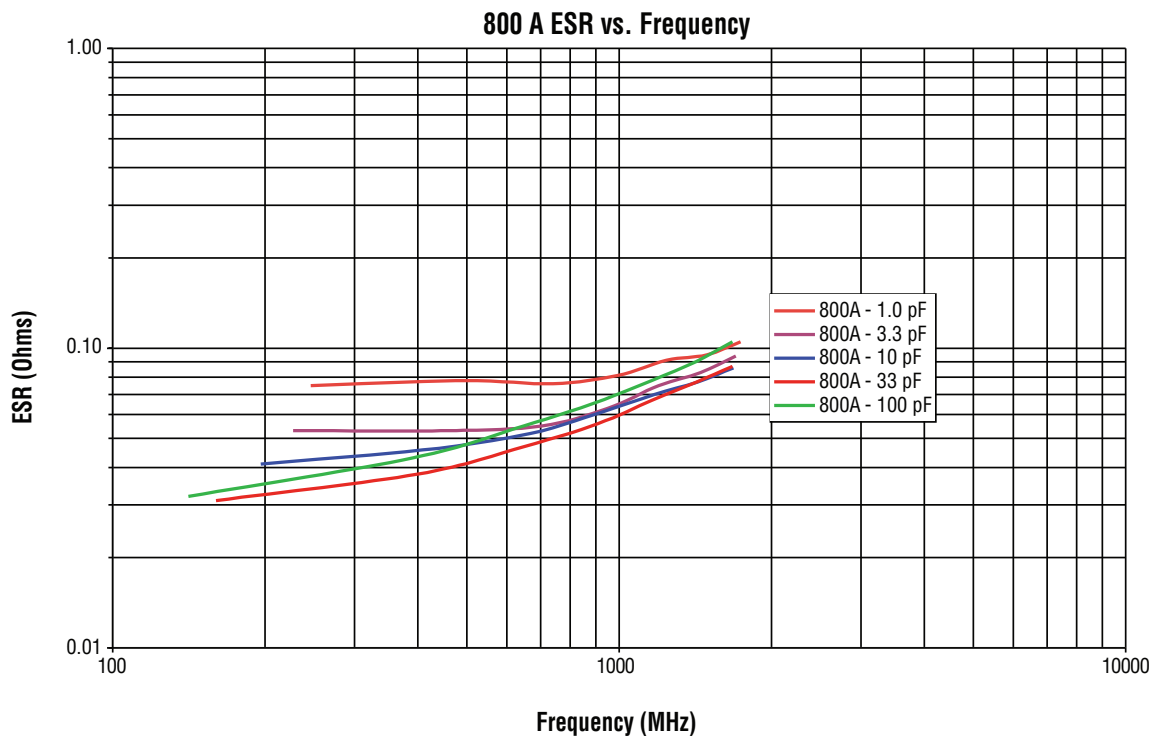

ATC 800 A Series Data Sheet Test Condition Description

Capacitors horizontally mounted in series microstrip configuration on 23.3-mil thick Rogers RO4350[®] softboard, 52-mils wide 1/2 oz. Cu traces.
FSR = lowest frequency at which S11 response, referenced at capacitor edge, crosses real axis on Smith Chart.
FPR = lowest frequency at which there is a notch in S21 magnitude response.


A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
 sales@atceramics.com

ATC Europe
 saleseur@atceramics.com

ATC Asia
 sales@atceramics-asia.com

ATC 800 A Performance Data

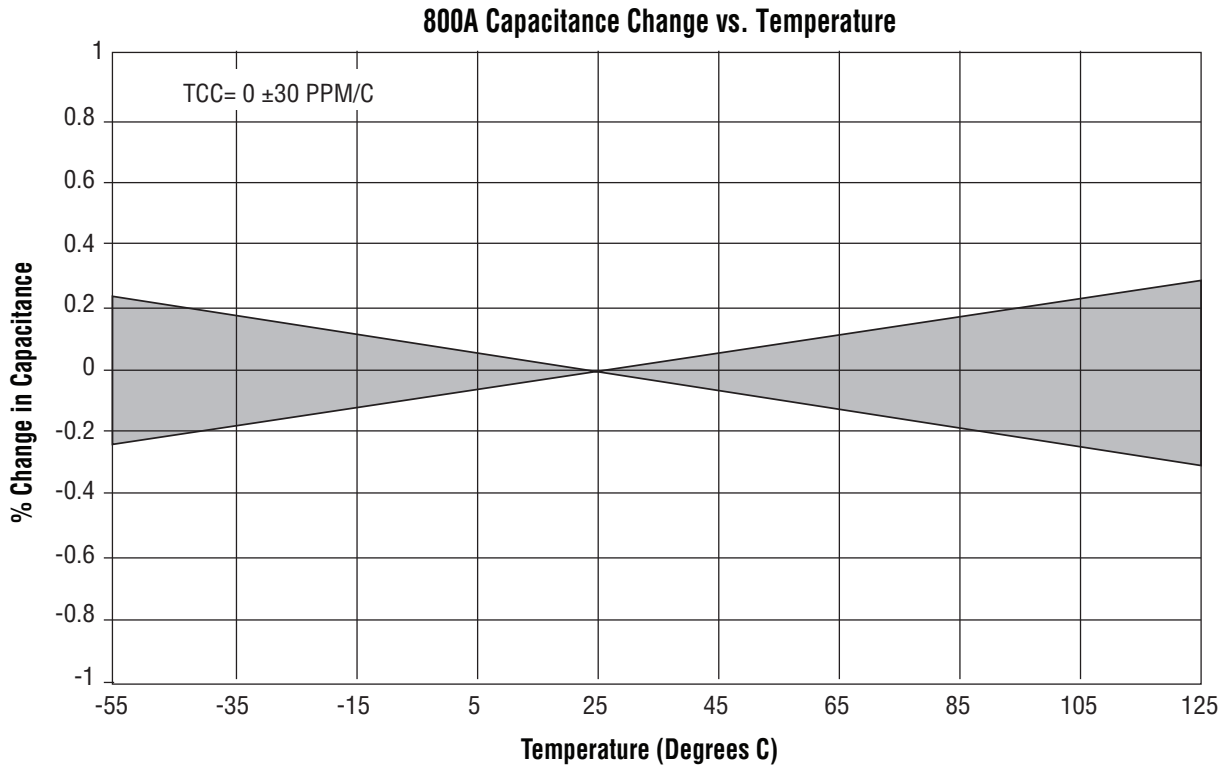

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale. ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 2006 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-1032 Rev. K, 7/20

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

www.atceramics.com