

# Surface Mount RF Transformer

## TC4-19LN+

50Ω 10 to 1900 MHz

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25 W
DC Current	150* mA

\* Equal current applied through center tap to secondary dot & secondary, need DC blocking capacitors on primary dot & primary. Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2

### Outline Drawing AT224-1A

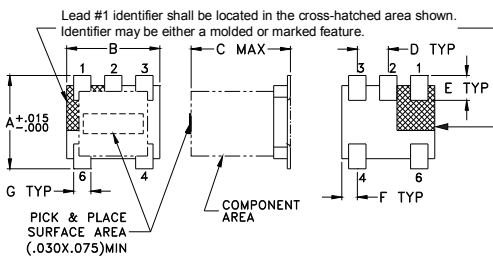

### PCB Land Pattern




### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64

G	H	J	K	wt
.028	.065	.190	.030	grams
0.71	1.65	4.83	0.76	0.15

### Config. H




### Features

- wideband, 10-1900 MHz
- balanced transmission line with secondary center tap
- plastic base with leads
- aqueous washable

### Applications

- PCS
- cellular



CASE STYLE: AT224-1A

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000


### Transformer Electrical Specifications

Ω RATIO (Secondary/Primary)	FREQ. (MHz)	INSERTION LOSS*			PHASE UNBALANCE (Deg.) Typ.		AMPLITUDE UNBALANCE (dB) Typ.	
		3 dB MHz	2 dB MHz	1 dB MHz	1 dB bandwidth	2 dB bandwidth	1 dB bandwidth	2 dB bandwidth
4	10-1900	10-1900	20-1000	30-700	4	6	0.3	0.5

\* Insertion Loss is referenced to mid-band loss, 1.0 dB typ.

### Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (deg.)
10.00	1.24	16.03	0.06	0.03
50.00	1.04	19.54	0.04	0.39
100.00	0.99	19.98	0.01	0.83
500.00	1.13	14.68	0.02	3.20
700.00	1.24	12.43	0.17	3.49
1000.00	1.55	9.92	0.49	3.74
1200.00	1.80	8.83	0.85	3.53
1500.00	2.34	7.69	1.47	3.59
1700.00	2.64	7.26	1.74	4.43
1900.00	2.99	7.01	1.95	4.99

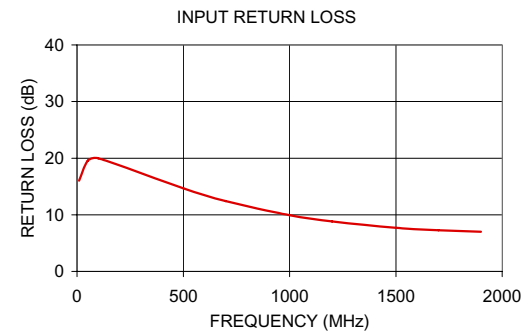

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

