

Miniature Surface Mount Fixed Attenuator

50Ω 0.5W 7dB DC to 2500 MHz

LAT-7+



Generic photo used for illustration purposes only

CASE STYLE: MMM168

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size Devices/Reel
7" 3000

Maximum Ratings


| | |
|-----------------------|----------------|
| Operating Temperature | -55°C to 85°C |
| Storage Temperature | -55°C to 100°C |

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

| | |
|--------|-----|
| INPUT | 4 |
| OUTPUT | 2 |
| GROUND | 1,3 |


Outline Drawing

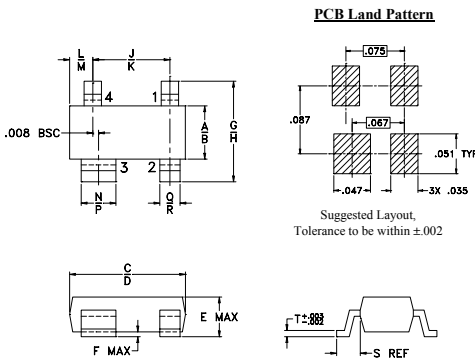

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | H | J | K | |
|------|------|------|------|------|------|------|------|------|------|-------|
| .045 | .055 | .105 | .120 | .047 | .005 | .083 | .104 | .070 | .080 | |
| 1.14 | 1.40 | 2.67 | 3.05 | 1.19 | 0.13 | 2.11 | 2.64 | 1.78 | 2.03 | |
| L | M | N | P | Q | R | S | T | | | wt |
| .018 | .024 | .030 | .036 | .015 | .021 | .023 | .005 | | | grams |
| 0.46 | 0.61 | 0.76 | 0.91 | 0.38 | 0.53 | 0.58 | 0.13 | | | 0.01 |

Demo Board MCL P/N: TB-39 Suggested PCB Layout (PL-225)

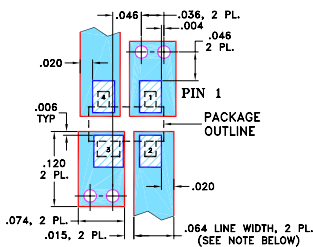

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wideband, DC to 2500 MHz
- excellent VSWR, through entire band
- miniature size, SOT143 package
- aqueous washable

Applications

- cellular
- PCS
- ISM
- VHF/UHF

Electrical Specifications at 25°C

| FREQ. RANGE (MHz) | ATTENUATION (dB) Flatness, Max. | VSWR (:1) Max. | | | MAX. INPUT POWER ¹ (W) |
|-------------------|------------------------------------|----------------|----------|------------|-----------------------------------|
| | | DC-0.5 GHz | DC-1 GHz | DC-2.5 GHz | |
| f_L - f_U | Norm. | DC-0.5 GHz | DC-1 GHz | DC-2.5 GHz | |
| DC-2500 | 7±0.3 | 1.3 | 1.4 | 1.5 | 0.5 |

1. RF power at 25°C case temperature: ½Watt. Derate linearly to 0.2 Watt at 85°C.
2. Flatness= variation over band divided by 2

Typical Performance Data

| Frequency (MHz) | Attenuation (dB) | VSWR (:1) |
|-----------------|------------------|-----------|
| 1.00 | 6.98 | 1.07 |
| 10.00 | 7.00 | 1.07 |
| 50.00 | 7.03 | 1.07 |
| 100.00 | 7.07 | 1.07 |
| 500.00 | 7.11 | 1.07 |
| 1000.00 | 7.15 | 1.08 |
| 1600.00 | 7.19 | 1.13 |
| 2000.00 | 7.25 | 1.16 |
| 2250.00 | 7.19 | 1.17 |
| 2500.00 | 7.25 | 1.19 |

