NOT RECOMMENDED FOR NEW DESIGNS USE SS12-LTP-SS110-LTP SERIES



Micro Commercial Components



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939 SS12 THRU SS110

Features

- Lead Free Finish/Rohs Compliant (Note1) ("P"Suffix designates Compliant. See ordering information)
- Low Forward Voltage
- Guard Ring Protection
- High Current Capability
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Maximum Ratings

- Operating Temperature: -55°C to +125°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 28°C/W Junction To Lead

MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
SS12	SS12	20V	14V	20V
SS13	SS13	30V	21V	30V
SS14	SS14	40V	28V	40V
SS15	SS15	50V	35V	50V
SS16	SS16	60V	42V	60V
SS18	SS18	80V	56V	80V
SS110	SS110	100V	70V	100V


Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward	$I_{F(AV)}$	1.0A	T _J = 100°C
Current Peak Forward Surge	I _{FSM}	30A	8.3ms, half sine
Current	IFSM	307	0.0m3, nam sine
Maximum			
Instantaneous			
Forward Voltage			
SS12	V_{F}	.45V	$I_{FM} = 1.0A;$
SS13		.55V	T _J = 25°C*
SS14		.60V	
SS15-16		.70V	
SS18-110		.85V	
Maximum DC			
Reverse Current At	I_R	0.5mA	T _A = 25°C
Rated DC Blocking		20mA	T _A = 100°C
Voltage			A
Typical Junction			
Capacitance			
SS12 - SS16	CJ	110pF	Measured at
SS18-SS110		30pF	1.0MHz, V _R =4.0V


^{*}Pulse test: Pulse width 300 µsec, Duty cycle 2%

Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.

1 Amp Schottky Rectifier 20 to 100 Volts




DIMENSIONS					
	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
Α	.078	.116	1.98	2.95	
В	.067	.089	1.70	2.25	
С	.002	.008	.05	.20	
D	_	.02		.51	
E	.035	.055	.89	1.40	
F	.065	.096	1.65	2.45	
G	.205	.224	5.21	5.69	
Н	.160	.180	4.06	4.57	
J	.100	.112	2.57	2.84	




SS12 thru SS110




Figure 1
Typical Forward Characteristics




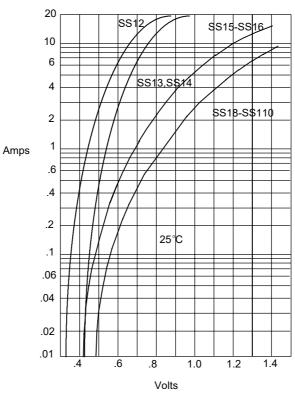

Instantaneous Forward Current - Amperesversus Instantaneous Forward Voltage - Volts



Average Forward Rectified Current - Amperes/ersus Ambient Temperature - °C



Peak Forward Surge Current - Amperesversus Number Of Cycles At 60Hz - Cycles



Micro Commercial Components

Ordering Information:

Device	Packing	
Part Number-TP	Tape&Reel: 3Kpcs/Reel	

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{Micro Commercial Components (MCC)}}{\text{SS110-TP SS18-TP SS22-TP SS23-TP}}:$