

ATC 700 A Series NPO Porcelain and Ceramic Multilayer Capacitors

- Case A Size (.055" x .055")
- Low ESR/ESL
- Low Noise
- Rugged Construction
- Extended WVDC up to 250 VDC
- Capacitance Range 0.1 pF to 1000 pF
- Zero TCC
- High Self-Resonance
- Established Reliability (QPL)

ATC, the industry leader, offers new improved ESR/ESL performance for the 700 A Series RF/Microwave Capacitors. The superior high self-resonance and zero TCC characteristic of this Series provide excellent performance over a broad range of RF and microwave applications requiring minimum drift. High density porcelain and ceramic constructions provide a rugged, hermetic package.

Typical functional applications: Bypass, Coupling, Tuning and DC Blocking.

Typical circuit applications: Filters, Oscillators and Timing

ENVIRONMENTAL TESTS

ATC 700 A Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A.

MOISTURE RESISTANCE:


MIL-STD-202, Method 106.

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C. 200% WVDC applied.

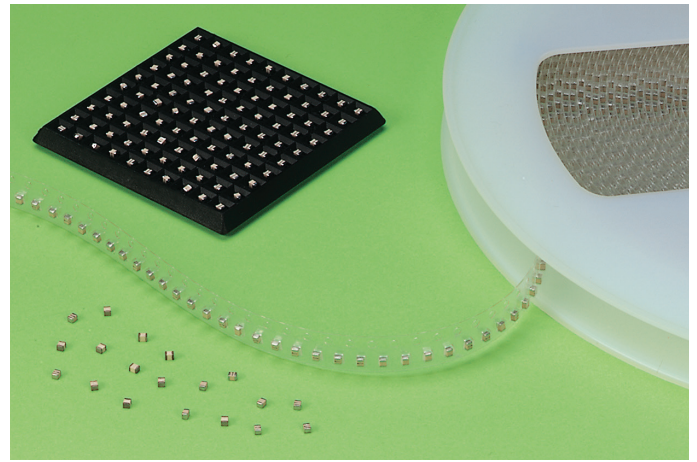

ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q):

Greater than 10,000 (0.1 pF to 100 pF) @ 1 MHz.

Greater than 2000 (110 pF to 1000 pF) @ 1 MHz.

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

0 ±30 PPM/°C (-55°C to +125°C)

INSULATION RESISTANCE (IR):

0.1 pF to 470 pF:

10⁶ Megohms min. @ +25°C at rated WVDC.

10⁵ Megohms min. @ +125°C at rated WVDC.

510 pF to 1000 pF:

10⁵ Megohms min. @ +25°C at rated WVDC.

10⁴ Megohms min. @ +125°C at rated WVDC.

WORKING VOLTAGE (WVDC): See Capacitance Values Table, p 2.

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

250% of rated WVDC for 5 secs.

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater.

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS: None

(No capacitance variation with voltage or pressure).

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater.

OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage).

TERMINATION STYLES: Available in various surface mount styles. See Mechanical Configurations, page 3.

TERMINAL STRENGTH: Terminations for chips and pellets withstand a pull of 5 lbs. min., 10 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor.



AMERICAN

ATC North America

sales@atceramics.com

TECHNICAL

ATC Europe

saleseur@atceramics.com

CERAMICS

ATC Asia

sales@atceramics-asia.com



ISO 9001 REGISTERED
COMPANY

THE ENGINEERS' CHOICE®

www.atceramics.com

ATC # 001-813 Rev.O, 7/20

ATC 700 A Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	
			STD.	EXT.				STD.	EXT.				STD.	EXT.				STD.	EXT.
0R1	0.1	B	150	250	2R4	2.4	B, C, D	150	250	200	20	F, G, J, K, M	150	EXTENDED VOLTAGE	151	150	F, G, J, K, M	150	N/A
0R2	0.2				2R7	2.7				220	22				161	160			
0R3	0.3	B, C			3R0	3.0				240	24				181	180			
0R4	0.4				3R3	3.3				270	27				201	200			
0R5	0.5	B, C, D			3R6	3.6				300	30				221	220			
0R6	0.6				3R9	3.9				330	33				241	240			
0R7	0.7				4R3	4.3				360	36				271	270			
0R8	0.8				4R7	4.7				390	39				301	300			
0R9	0.9				5R1	5.1				430	43				331	330			
1R0	1.0				5R6	5.6				470	47				361	360			
1R1	1.1		6R2	6.2	510	51	391	390											
1R2	1.2		B, C, D	6R8	6.8	560	56	431	430										
1R3	1.3			B, C, J, K, M	7R5	7.5	620	62	471	470									
1R4	1.4				8R2	8.2	680	68	511	510									
1R5	1.5	9R1			9.1	750	75	561	560										
1R6	1.6	100			10	820	82	621	620										
1R7	1.7	110			11	910	91	681	680										
1R8	1.8	120			12	101	100	751	750										
1R9	1.9	F, G, J, K, M			130	13	111	110	821	820									
2R0	2.0				150	15	121	120	911	910									
2R1	2.1				160	16	131	130	102	1000									
2R2	2.2		180		18														

VRMS = 0.707 x WVDC

SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.

NOTE: EXTENDED WVDC DOES NOT APPLY TO CDR PRODUCTS.

Capacitance values in **bold** type indicate porcelain dielectric. All other capacitance values indicate ceramic dielectric.
All 700 A Capacitors are available laser marked with ATC's identification, capacitance code and tolerance.

ATC PART NUMBER CODE

700 A 6R 8 J W 150 X T

Series _____

Case Size _____

Capacitance Code: _____
First 2 significant digits for capacitance.
R=Decimal Point

Indicates number of zeros following digits _____
of capacitance in picofarads except for decimal values.

Capacitance Tolerance _____

Packaging
T - Tape and Reel, 1000 pc. qty.*
TV - Vertical Orientation of Product, Tape and Reel, 1000 pc. qty.*
I - Special Packaging. Consult Factory.
*Consult ATC for other quantities

ATC Cap-Pac® packaging (100 pc. qty. std.) is also available. For this option, leave last field blank.

Laser Marking

WVDC

Termination Code

CAPACITANCE TOLERANCE								
Code	B	C	D	F	G	J	K	M
Tol.	±0.1 pF	±0.25 pF	±0.5 pF	±1%	±2%	±5%	±10%	±20%

The above part number refers to a 700 A Series (case size A) 6.8 pF capacitor, J tolerance (±5%), 150 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and ATC Cap-Pac® packaging.

For additional information and catalogs contact your ATC representative or call direct at (631) 622-4700.

Consult factory for additional performance data.









A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 700 A Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	MIL-PRF-55681	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			Lead and Termination Dimensions and Materials	
					LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
700A	W	CDR12BG	A  Solder Plate		.055 +.015 -.010 (1.40 +0.38 -.25)	.055±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 + .010 -.005 (0.25 +0.25 - 0.13)	Tin/Lead, Solder Plated over Nickel Barrier Termination
700A	P	CDR12BG	A  Pellet		.055 +.025 -.010 (1.40 +0.64 -.25)	.055±.015 (1.40 ±0.38)	.057 (1.45) max.		Heavy Tin/Lead Coated, over Nickel Barrier Termination
700A	T	N/A	A  Solderable Nickel Barrier		.055 +.015 -.010 (1.40 +0.38 -.25)	.055±.015 (1.40 ±0.38)	.057 (1.45) max.		RoHS Compliant Tin Plated over Nickel Barrier Termination
700A	CA	CDR11BG	A  Gold Chip		.055 +.015 -.010 (1.40 +0.38 -.25)	.055±.015 (1.40 ±0.38)	.057 (1.45) max.		RoHS Compliant Gold Plated over Nickel Barrier Termination

For a complete military catalog, request American Technical Ceramics document ATC 001-818.

ATC 700 A Non-Magnetic Capacitors: Mechanical Configurations*

ATC SERIES & CASE SIZE	ATC TERM. CODE	MIL-PRF-55681	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
					LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
700A	WN	Meets Requirements	A Non-Mag Solder Plate		.055 +.025 -.010 (1.40 +0.64 -0.25)	.055±.015 (1.40 ±0.38)	.057 (1.45)	.010 + .010 -.005 (0.25 +0.25 - 0.13)	Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination
700A	PN	Meets Requirements	A Non-Mag Pellet		.055 +.035 -.010 (1.40 +0.89 -0.25))	.055±.015 (1.40 ±0.38)	.057 (1.45)		Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination
700A	TN	Meets Requirements	A Non-Mag Solderable Barrier		.055 +.025 -.010 (1.40 +0.64 -0.25)	.055±.015 (1.40 ±0.38)	.057 (1.45)		RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination

*Capacitors with values greater than 100 pF contain a trace magnetic element that may exhibit weak magnetic properties.

Suggested Mounting Pad Dimensions

Horizontal Electrode Orientation


Vertical Electrode Orientation

Case A


	Pad Size	A Min.	B Min.	C Min.	D Min.
Vertical Mount	Normal	.070	.050	.030	.130
	High Density	.050	.030	.030	.090
Horizontal Mount	Normal	.080	.050	.030	.130
	High Density	.060	.030	.030	.090

ATC 700 A Performance Data


**ESR VS. CAPACITANCE
ATC SERIES 700, CASE A**

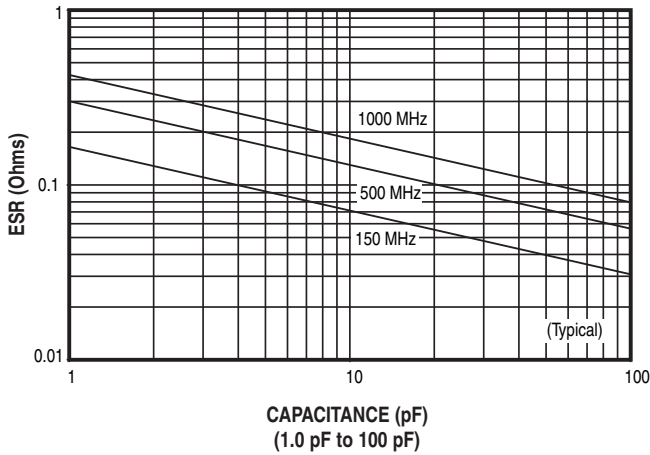


**Q VS. CAPACITANCE
ATC SERIES 700, CASE A**

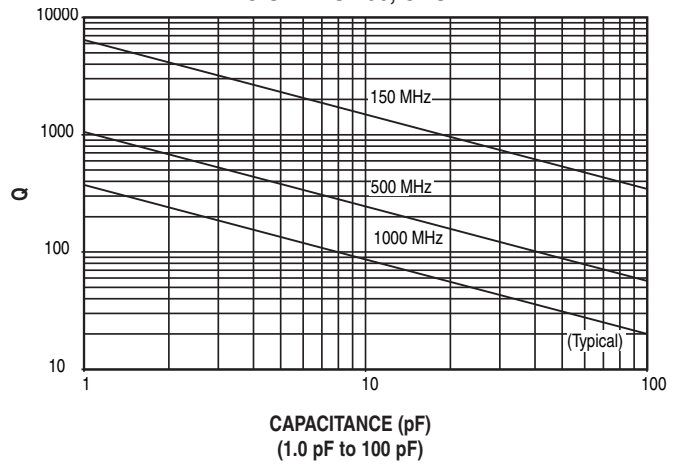


**ESR VS. CAPACITANCE
ATC SERIES 700, CASE A**

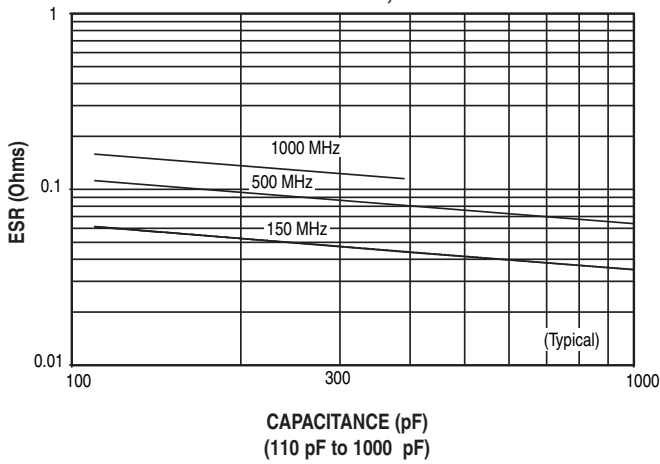


**Q VS. CAPACITANCE
ATC SERIES 700, CASE A**

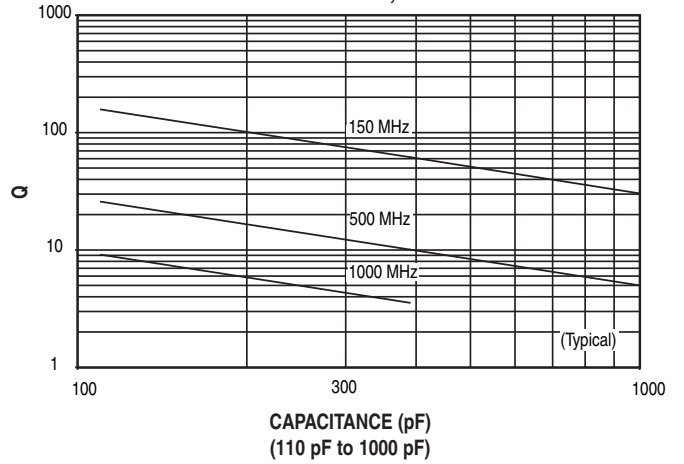

**SERIES RESONANCE VS. CAPACITANCE
ATC SERIES 700, CASE A**

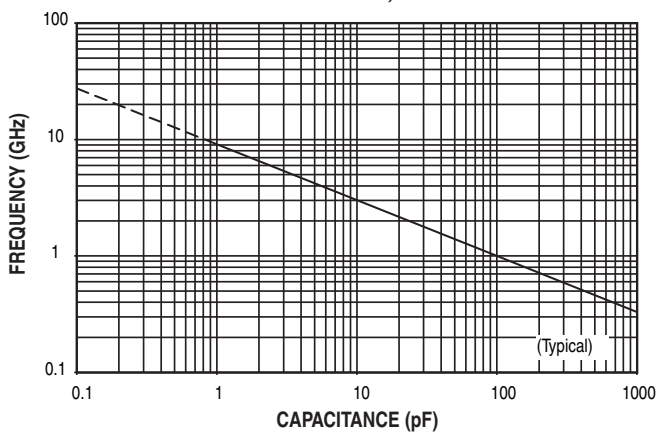

**CAPACITANCE CHANGE VS. TEMPERATURE
ATC SERIES 700, CASE A**

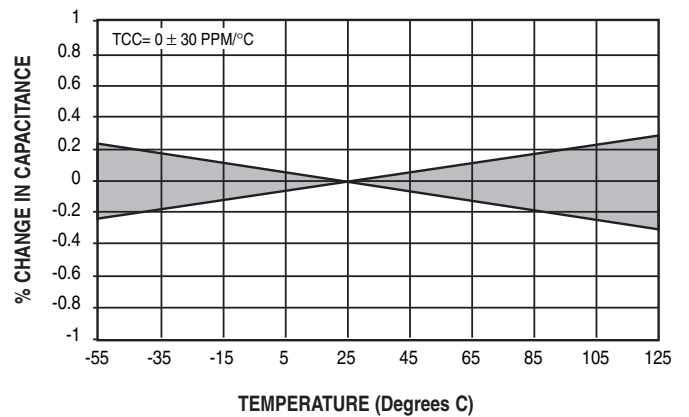

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America
sales@atceramics.com

ATC Europe
saleseur@atceramics.com


ATC Asia
sales@atceramics-asia.com

ATC 700 A Performance Data


**CURRENT RATING VS. CAPACITANCE
ATC SERIES 700, CASE A**

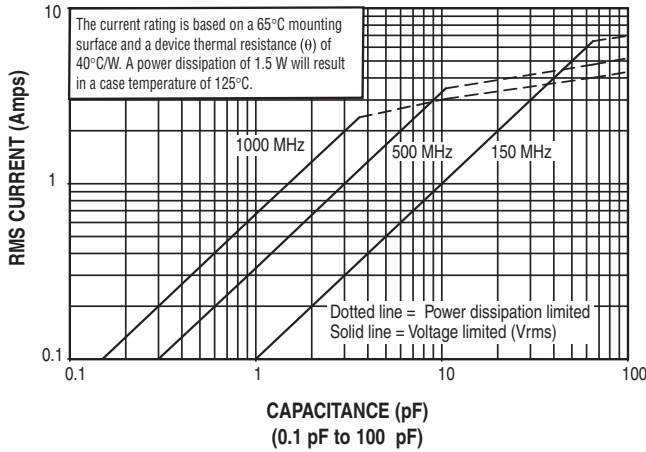


**CURRENT RATING VS. CAPACITANCE
ATC SERIES 700, CASE A**

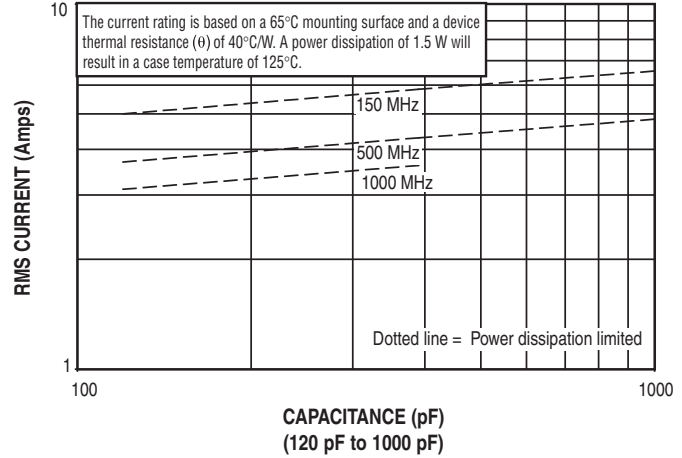

**CURRENT RATING VS. CAPACITANCE
ATC SERIES 700, CASE A, EXTENDED VOLTAGE**

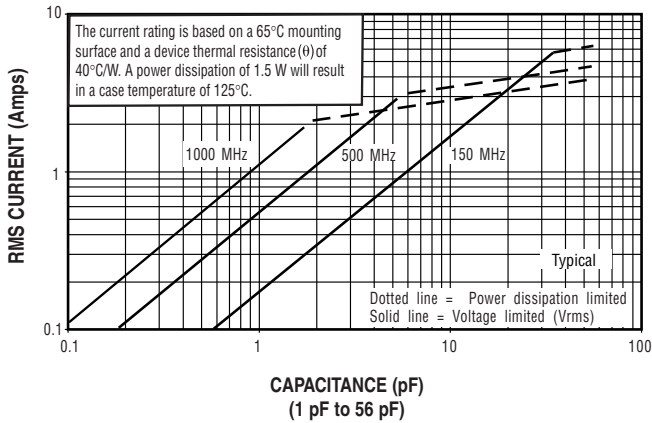

**CURRENT RATING VS. CAPACITANCE
ATC SERIES 700, CASE A, EXTENDED VOLTAGE**

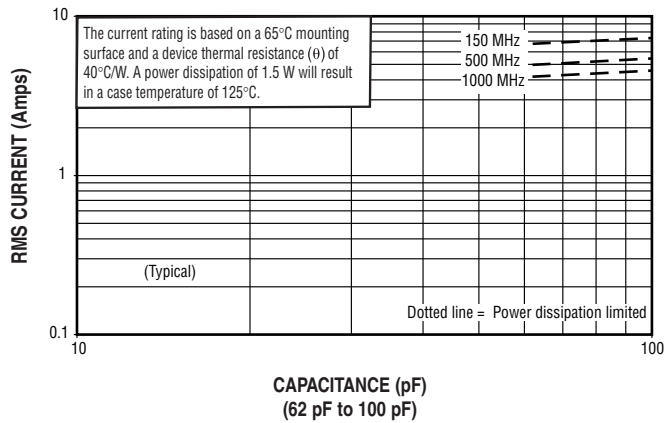

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 1996 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-813 Rev. O, 7/20



AMERICAN
ATC North America
sales@atceramics.com

TECHNICAL
ATC Europe
saleseur@atceramics.com

CERAMICS
ATC Asia
sales@atceramics-asia.com

THE ENGINEERS' CHOICE®
ISO 9001 REGISTERED COMPANY

THE ENGINEERS' CHOICE®

www.atceramics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

[700A0R1BT150XT](#) [700A0R1BW150XT](#) [700A0R2BT150XT](#) [700A0R3BT150XT](#) [700A0R3CW150XT](#)
[700A0R4BT150XT](#) [700A0R5BT150XT](#) [700A0R5DW150XT](#) [700A0R6BW150XT](#) [700A0R6CT150XT](#)
[700A0R7BT150XT](#) [700A0R7BW150XT](#) [700A0R7CT150XT](#) [700A0R7CW150XT](#) [700A0R7DW150XT](#)
[700A0R8BW150XT](#) [700A0R8CT150XT](#) [700A0R8CW150XT](#) [700A0R8DW150XT](#) [700A0R9BT150XT](#)
[700A0R9BW150XT](#) [700A0R9CT150XT](#) [700A0R9CW150XT](#) [700A0R9DT150XT](#) [700A0R9DW150XT](#)
[700A100GW150XT](#) [700A100JW150XT](#) [700A100KT150XT](#) [700A100MT150XT](#) [700A100MW150XT](#)
[700A101GW150XT](#) [700A101JW150XT](#) [700A101KT150XT](#) [700A101KW150XT](#) [700A101MT150XT](#) [700A102FT50XT](#)
[700A102FW50XT](#) [700A102JW50XT](#) [700A102KT50XT](#) [700A102KW50XT](#) [700A102MW50XT](#) [700A110FW150XT](#)
[700A110JT150XT](#) [700A111FT150XT](#) [700A111FW150XT](#) [700A111GT150XT](#) [700A111JT150XT](#) [700A111JW150XT](#)
[700A111KW150XT](#) [700A111MW150XT](#) [700A120FT150XT](#) [700A120FW150XT](#) [700A120KW150XT](#)
[700A120MT150XT](#) [700A121GT150XT](#) [700A121JW150XT](#) [700A121KT150XT](#) [700A121KW150XT](#) [700A121MT150XT](#)
[700A130GT150XT](#) [700A130JT150XT](#) [700A130KT150XT](#) [700A130KW150XT](#) [700A130MT150XT](#)
[700A130MW150XT](#) [700A131FT150XT](#) [700A131JT150XT](#) [700A131JW150XT](#) [700A131KW150XT](#) [700A131MW150XT](#)
[700A150FT150XT](#) [700A150JT150XT](#) [700A150JW150XT](#) [700A150KW150XT](#) [700A151FT150XT](#) [700A151JT150XT](#)
[700A151MT150XT](#) [700A151MW150XT](#) [700A160FT150XT](#) [700A160GW150XT](#) [700A160KW150XT](#)
[700A161GT150XT](#) [700A161JT150XT](#) [700A161JW150XT](#) [700A161MT150XT](#) [700A180FW150XT](#) [700A180JT150XT](#)
[700A180JW150XT](#) [700A180KT150XT](#) [700A180KW150XT](#) [700A180MT150XT](#) [700A181FW150XT](#) [700A181GT150XT](#)
[700A181GW150XT](#) [700A181KW150XT](#) [700A181MT150XT](#) [700A1R0BT150XT](#) [700A1R0CT150XT](#)
[700A1R0DT150XT](#) [700A1R1BT150XT](#)