

SERIES


1638R
1638



Molded Unshielded RF Coils

DASH NUMBER*
INDUCTANCE (μH) ±5%
TEST FREQUENCY (MHz)
Q MINIMUM
SRF MINIMUM (MHz)
DC RESISTANCE MAXIMUM (OHMS)
CURRENT RATING MAXIMUM (mA)

Actual Size

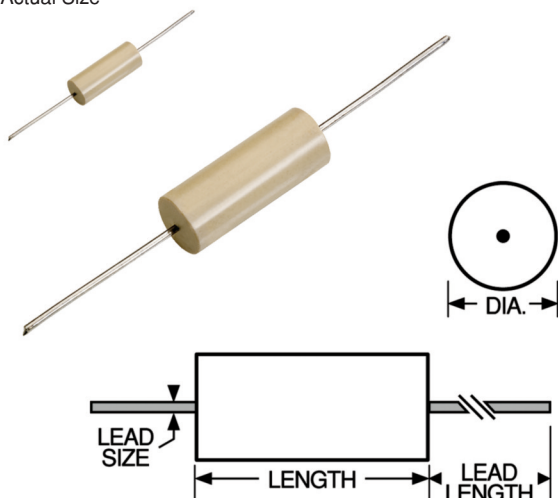

SERIES 1638 IRON CORE						
-00J	270	65	0.79	5.7	11.0	143
-02J	300	65	0.79	5.4	11.5	140
-04J	330	65	0.79	5.1	12.0	136
-06J	360	65	0.79	4.8	12.5	134
-08J	390	65	0.79	4.5	16.3	117
-10J	430	65	0.79	4.2	17.1	115
-12J	470	65	0.79	3.9	17.9	112
-14J	510	65	0.79	3.7	18.8	109
-16J	560	65	0.79	3.8	19.5	107
-18J	620	65	0.79	3.3	25.9	93
-20J	680	65	0.79	3.1	27.2	91
-22J	750	65	0.79	2.9	28.6	88
-24J	820	65	0.79	2.7	30.0	86
-26J	910	65	0.79	2.5	31.5	84
-28J	1000	65	0.79	2.3	33.0	82

Optional Tolerances: H = 3% G = 2% F = 1%
*Complete part # must include series # PLUS the dash #

Physical Parameters

	Inches	Millimeters
Length	0.375 ± 0.010	9.53 ± 0.25
Diameter	0.156 ± 0.010	3.96 ± 0.25
Lead Size		
AWG #22 TCW	0.025 ± 0.002	0.635 ± 0.051
Lead Length	1.44 ± 0.12	36.58 ± 3.05

Current Rating at 90°C Ambient 35°C Rise

Operating Temperature -55°C to +125°C

Maximum Power Dissipation at 90°C 0.312 W

Weight Max. (Grams) 1.0

Core Material Iron

Marking DELEVAN; inductance with units and tolerance; date code (YYWWL). Note: An R before the date code indicates a RoHS component.

Example: 1638R-16J

<i>Front:</i>	<i>Reverse:</i>
DELEVAN	R 0828A
560uH±5%	

Packaging Tape & reel: 12" reel, 2500 pieces max.; 14" reel, 4000 pieces max.

Made in the U.S.A.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

API Delevan:

[1638-00J](#) [1638-00H](#) [1638-00G](#) [1638-00F](#) [1638-02J](#) [1638-02H](#) [1638-02G](#) [1638-02F](#) [1638-04J](#) [1638-04H](#) [1638-04G](#) [1638-04F](#) [1638-06J](#) [1638-06H](#) [1638-06G](#) [1638-06F](#) [1638-08J](#) [1638-08H](#) [1638-08G](#) [1638-08F](#) [1638-10J](#) [1638-10H](#) [1638-10G](#) [1638-10F](#) [1638-12J](#) [1638-12H](#) [1638-12G](#) [1638-12F](#) [1638-14J](#) [1638-14H](#) [1638-14G](#) [1638-14F](#) [1638-16J](#) [1638-16H](#) [1638-16G](#) [1638-16F](#) [1638-18J](#) [1638-18H](#) [1638-18G](#) [1638-18F](#) [1638-20J](#) [1638-20H](#) [1638-20G](#) [1638-20F](#) [1638-22J](#) [1638-22H](#) [1638-22G](#) [1638-22F](#) [1638-24J](#) [1638-24H](#) [1638-24G](#) [1638-24F](#) [1638-26J](#) [1638-26H](#) [1638-26G](#) [1638-26F](#) [1638-28J](#) [1638-28H](#) [1638-28G](#) [1638-28F](#) [1638R-00J](#) [1638R-00H](#) [1638R-00G](#) [1638R-00F](#) [1638R-02J](#) [1638R-02H](#) [1638R-02G](#) [1638R-02F](#) [1638R-04J](#) [1638R-04H](#) [1638R-04G](#) [1638R-04F](#) [1638R-06J](#) [1638R-06H](#) [1638R-06G](#) [1638R-06F](#) [1638R-08J](#) [1638R-08H](#) [1638R-08G](#) [1638R-08F](#) [1638R-10J](#) [1638R-10H](#) [1638R-10G](#) [1638R-10F](#) [1638R-12J](#) [1638R-12H](#) [1638R-12G](#) [1638R-12F](#) [1638R-14J](#) [1638R-14H](#) [1638R-14G](#) [1638R-14F](#) [1638R-16J](#) [1638R-16H](#) [1638R-16G](#) [1638R-16F](#) [1638R-18J](#) [1638R-18H](#) [1638R-18G](#) [1638R-18F](#)