SCHS239C - SEPTEMBER 1998 - REVISED MARCH 2003

- Internal Look-Ahead for Fast Counting
- Carry Output for n-Bit Cascading
- Synchronous Counting
- Synchronously Programmable
- SCR-Latchup-Resistant CMOS Process and Circuit Design
- Exceeds 2-kV ESD Protection per MIL-STD-883, Method 3015

CD54AC161 . . . F PACKAGE CD74AC161 ... E OR M PACKAGE (TOP VIEW) CLR 16 V_{CC} CLK 2 15 RCO ΑH 3 14 🛮 Q_A B 🛮 4 13 Q_B C 🛮 5 12 Q_C D Π 6 11 Q_D ENP [] 7 10 ENT GND II 8 9 LOAD

description/ordering information

The 'AC161 devices are 4-bit binary counters. These synchronous, presettable counters feature an internal carry look-ahead for application in

high-speed counting These devices are fully programmable; that is, they can be preset to any number between 0 and 9 or 15. Presetting is synchronous; therefore, setting up a low level at the load input disables the counter and causes the outputs to agree with the setup data after the next clock pulse, regardless of the levels of the enable inputs.

The clear function is asynchronous. A low level at the clear (\overline{CLR}) input sets all four of the flip-flop outputs low, regardless of the levels of the CLK, load (\overline{LOAD}) , or enable inputs.

The carry look-ahead circuitry provides for cascading counters for n-bit synchronous applications without additional gating. Instrumental in accomplishing this function are ENP, ENT, and a ripple-carry output (RCO). Both ENP and ENT must be high to count, and ENT is fed forward to enable RCO. Enabling RCO produces a high-level pulse while the count is maximum (9 or 15, with Q_A high). This high-level overflow ripple-carry pulse can be used to enable successive cascaded stages. Transitions at ENP or ENT are allowed, regardless of the level of CLK.

The counters feature a fully independent clock circuit. Changes at control inputs (ENP, ENT, or $\overline{\text{LOAD}}$) that modify the operating mode have no effect on the contents of the counter until clocking occurs. The function of the counter (whether enabled, disabled, loading, or counting) is dictated solely by the conditions meeting the stable setup and hold times.

ORDERING INFORMATION

TA	PAC	KAGET	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	PDIP – E	Tube	CD74AC161E	CD74AC161E
–55°C to 125°C	SOIC - M	Tube	CD74AC161M	MARKING CD74AC161E AC161M
-55 0 10 125 0	SOIC - IVI	Tape and reel	CD74AC161M96	ACTOTIVI
	CDIP – F	Tube	CD54AC161F3A	CD54AC161F3A

[†] Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



SCHS239C - SEPTEMBER 1998 - REVISED MARCH 2003

FUNCTION TABLE


		IN	IPUTS			OUT	PUTS	FUNCTION
CLR	CLK ENP		ENT	LOAD	A,B,C,D	Qn	RCO	FUNCTION
L	Χ	Χ	Χ	Х	Χ	L	L	Reset (clear)
Н	↑	Х	Х	I	I	L	L	Parallel load
Н	\uparrow	Χ	Χ	I	h	Н	Note 1	Parallel load
Н	↑	h	h	h	Χ	Count	Note 1	Count
Н	Χ	!	Χ	h	Х	q _n	Note 1	Inhibit
Н	Χ	Χ	I	h	Χ	q _n	L	HIHIDIC

H = high level, L = low level, X = don't care, h = high level one setup time prior to the CLK low-to-high transition, I = low level one setup time prior to the CLK low-to-high transition, q = the state of the referenced output prior to the CLK low-to-high transition, and \uparrow = CLK low-to-high transition.

NOTE 1: The RCO output is high when ENT is high and the counter is at terminal count (HHHH).




logic diagram (positive logic)

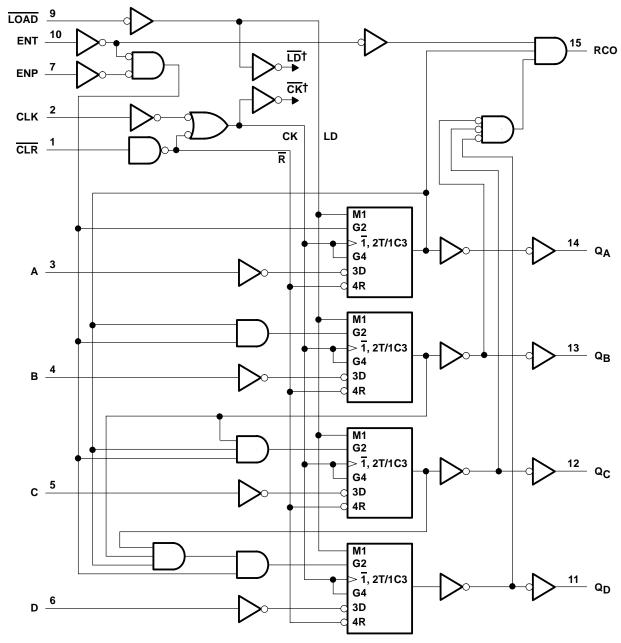


[†] For simplicity, routing of complementary signals $\overline{\mathsf{LD}}$ and $\overline{\mathsf{CK}}$ is not shown on this overall logic diagram. The uses of these signals are shown on the logic diagram of the D/T flip-flops.

SCHS239C - SEPTEMBER 1998 - REVISED MARCH 2003

logic symbol, each D/T flip-flop

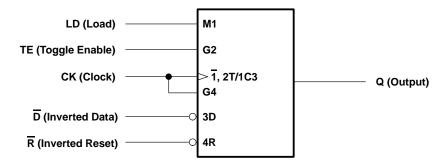

logic diagram, each D/T flip-flop (positive logic)

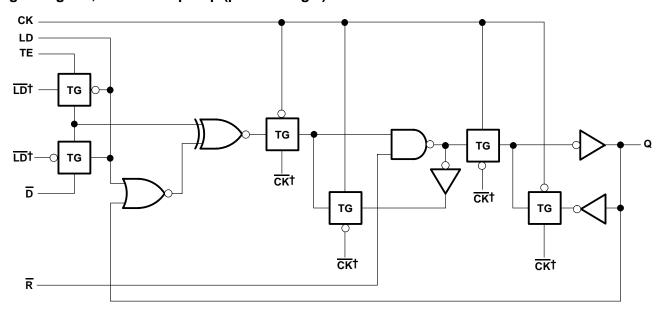


 $^{^{\}dagger}$ The origins of $\overline{\text{LD}}$ and $\overline{\text{CK}}$ are shown in the logic diagram of the overall device.

typical clear, preset, count, and inhibit sequence

The following sequence is illustrated below:

- 1. Clear outputs to zero (asynchronous)
- 2. Preset to binary 12
- 3. Count to 13, 14, 15, 0, 1, and 2
- 4. Inhibit

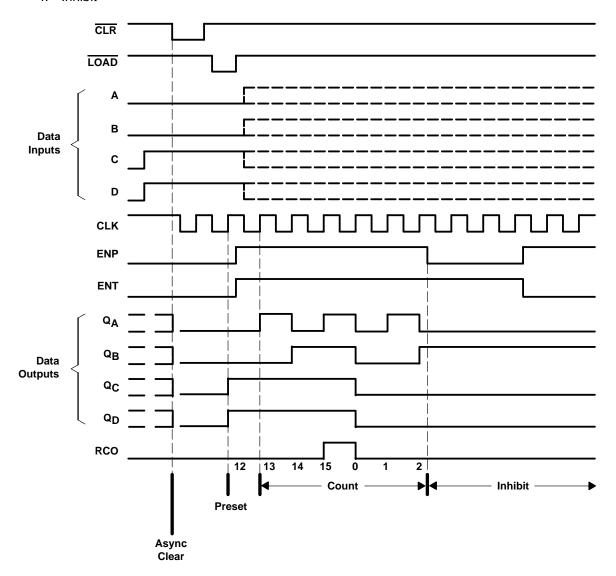

SCHS239C - SEPTEMBER 1998 - REVISED MARCH 2003

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V _{CC}	–0.5 V to 6 V
Input clamp current, I_{IK} ($V_I < 0 \text{ V or } V_I > V_{CC}$) (see Note 2)	±20 mA
Output clamp current, I _{OK} (V _O < 0 V or V _O > V _{CC}) (see Note 2)	±50 mA
Continuous output current, I _O (V _O > 0 V or V _O < V _{CC})	±50 mA
Continuous current through V _{CC} or GND	±100 mA
Package thermal impedance, θ _{JA} (see Note 3): E package	67°C/W
M package	73°C/W
Storage temperature range, T _{stg}	-65°C to 150°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

recommended operating conditions (see Note 4)

			T _A = 2	25°C	–55°0 125		–40°(85°		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	
Vcc	Supply voltage		1.5	5.5	1.5	5.5	1.5	5.5	V
		V _{CC} = 1.5 V	1.2		1.2		1.2		
VIH	High-level input voltage	V _{CC} = 3 V	2.1		2.1		2.1		V
		V _{CC} = 5.5 V	3.85		3.85		3.85		
		V _{CC} = 1.5 V		0.3		0.3		0.3	
VIL	Low-level input voltage	VCC = 3 V		0.9		0.9		0.9	V
		V _{CC} = 5.5 V		1.65		1.65		1.65	
٧ _I	Input voltage		0	VCC	0	VCC	0	VCC	V
٧o	Output voltage		0	VCC	0	VCC	0	VCC	V
ЮН	High-level output current			-24		-24		-24	mA
loL	Low-level output current			24		24		24	mA
Δt/Δν	Input transition rise or fall rate	V _{CC} = 1.5 V to 3 V		50		50		50	
ΔυΔν	Input transition rise or fall rate	$V_{CC} = 3.6 \text{ V to } 5.5 \text{ V}$		20		20		20	ns

NOTE 4: All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.



NOTES: 2. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

^{3.} The package thermal impedance is calculated in accordance with JESD 51-7.

SCHS239C - SEPTEMBER 1998 - REVISED MARCH 2003

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONI	DITIONS	VCC	T _A = 2	25°C	–55°(125		–40°(85°		UNIT
				MIN	MAX	MIN	MAX	MIN	MAX	
			1.5 V	1.4		1.4		1.4		
		I _{OH} = -50 μA	3 V	2.9		2.9		2.9		
			4.5 V	4.4		4.4		4.4		
Voн	$V_I = V_{IH}$ or V_{IL}	$I_{OH} = -4 \text{ mA}$	3 V	2.58		2.4		2.48		V
		$I_{OH} = -24 \text{ mA}$	4.5 V	3.94		3.7		3.8		
		$I_{OH} = -50 \text{ mA}^{\dagger}$	5.5 V	_		3.85		_		
		$I_{OH} = -75 \text{ mA}^{\dagger}$	5.5 V	_		_		3.85		
			1.5 V		0.1		0.1		0.1	
		$I_{OL} = 50 \mu\text{A}$	3 V		0.1		0.1		0.1	
			4.5 V		0.1		0.1		0.1	
VOL	$V_I = V_{IH}$ or V_{IL}	I _{OL} = 12 mA	3 V		0.36		0.5		0.44	V
		I _{OL} = 24 mA	4.5 V		0.36		0.5		0.44	
		$I_{OL} = 50 \text{ mA}^{\dagger}$	5.5 V		-		1.65		-	
		I _{OL} = 75 mA [†]	5.5 V		-		_		1.65	
lį	V _I = V _{CC} or GND		5.5 V		±0.1		±1		±1	μΑ
Icc	$V_I = V_{CC}$ or GND,	IO = 0	5.5 V		8		160		80	μΑ
C _i					10		10		10	pF

[†] Test one output at a time, not exceeding 1-second duration. Measurement is made by forcing indicated current and measuring voltage to minimize power dissipation. Test verifies a minimum 50-Ω transmission-line drive capability at 85°C and 75-Ω transmission-line drive capability at 125°C.

SCHS239C - SEPTEMBER 1998 - REVISED MARCH 2003

timing requirements over recommended operating free-air temperature range (unless otherwise noted)

			Vcc	–55° 125		–40°(85°		UNIT
				MIN	MAX	MIN	MAX	
					7		8	
fclock	Clock frequency		$3.3~\text{V}\pm0.3~\text{V}$		64		73	MHz
			5 V ± 0.5 V		90		103	
			1.5 V	69		61		
		CLK high or low	$3.3~\text{V}\pm0.3~\text{V}$	7.7		6.8		
	Dulas duration		5 V ± 0.5 V	5.5		4.8		
t _W	Pulse duration		1.5 V	63		55		ns
		CLR low	$3.3~V \pm 0.3~V$	7		6.1		
			5 V ± 0.5 V	5		4.4		
			1.5 V	63		55		
		A, B, C, or D	$3.3~V \pm 0.3~V$	7		6.1		
	Catura time a hafana OLKA		5 V ± 0.5 V	5		4.4		
t _{su}	Setup time, before CLK↑		1.5 V	75		66		ns
		LOAD	$3.3~V \pm 0.3~V$	8.4		7.4		
			5 V ± 0.5 V	6		5.3		
			1.5 V	0		0		
		A, B, C, or D	$3.3~V \pm 0.3~V$	0		0		
1.			5 V ± 0.5 V	0		0		
th	Hold time, after CLK↑		1.5 V	0		0		ns
		ENP or ENT	3.3 V ± 0.3 V	0		0		
			5 V ± 0.5 V	0		0		
			1.5 V	75		66		
t _{rec}	Recovery time, CLR↑ before CLK↑		3.3 V ± 0.3 V	8.4		7.4		ns
	-		5 V ± 0.5 V	6		5.3		

SCHS239C - SEPTEMBER 1998 - REVISED MARCH 2003


switching characteristics over recommended operating free-air temperature range, C_L = 50 pF (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	VCC	–55°(125		–40°(85°		UNIT
	(INFOT)	(001F01)		MIN	MAX	MIN	MAX	
			1.5 V	7		8		
f _{max}			$3.3 \ V \pm 0.3 \ V$	64		73		MHz
			5 V ± 0.5 V	90		103		
			1.5 V	-	209	-	190	
		RCO	$3.3 \ V \pm 0.3 \ V$	6	23.4	6	21	
	CLK		5 V ± 0.5 V	4.3	16.7	4.3	15.2	
	CLN		1.5 V – 207	-	188			
		Any Q	$3.3 \ V \pm 0.3 \ V$	5.9	23.1	5.9	21	
			5 V ± 0.5 V	4.2	16.5	4.2	15	
			1.5 V	_	129	_	117	
t _{pd}	ENT	RCO	$3.3 \text{ V} \pm 0.3 \text{ V}$	3.6	14.4	3.7	13.1	ns
			5 V ± 0.5 V	2.6	10.3	2.7	9.4	
			1.5 V	_	207	_	188	
		Any Q	$3.3~V \pm 0.3~V$	5.9	23.1	5.9	21	
	CLB		5 V ± 0.5 V	4.2	16.5	4.2	15	
	CLR		1.5 V	_	207	-	188	
		RCO	3.3 V ± 0.3 V	5.9	23.1	5.9	21]
			5 V ± 0.5 V	4.2	16.5	4.2	15	

operating characteristics, $T_A = 25^{\circ}C$

	PARAMETER	TEST CONDITIONS	TYP	UNIT
C _{pd}	Power dissipation capacitance	No load	66	pF

PARAMETER MEASUREMENT INFORMATION

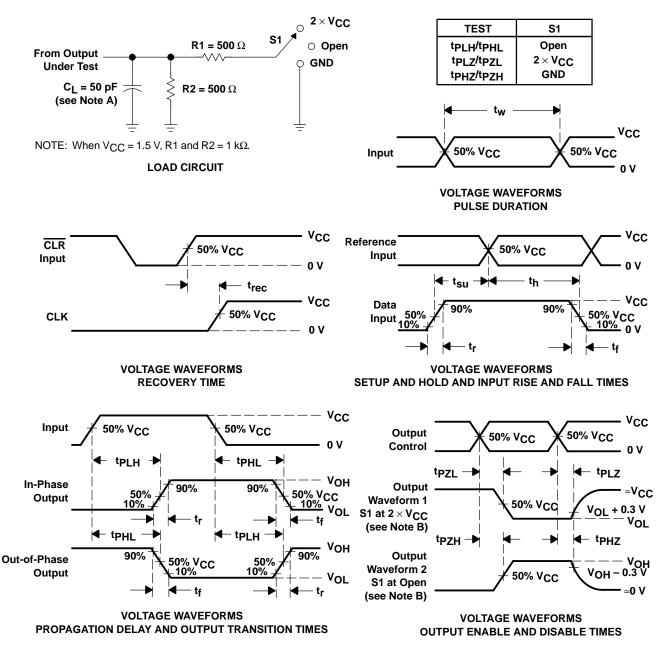

- NOTES: A. C_L includes probe and test-fixture capacitance.
 - B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
 - C. All input pulses are supplied by generators having the following characteristics: PRR \leq 1 MHz, $Z_O = 50 \Omega$, $t_r = 3 \text{ ns}$, $t_f = 3 \text{ ns}$. Phase relationships between waveforms are arbitrary.
 - D. For clock inputs, f_{max} is measured with the input duty cycle at 50%.
 - E. The outputs are measured one at a time with one input transition per measurement.
 - F. tpLH and tpHL are the same as tpd.
 - G. tpzL and tpzH are the same as ten.
 - H. tpl 7 and tpH7 are the same as tdis.
 - I. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms



www.ti.com 18-Nov-2023

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
CD54AC161F3A	ACTIVE	CDIP	J	16	25	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	CD54AC161F3A	Samples
CD74AC161E	ACTIVE	PDIP	N	16	25	RoHS & Green	NIPDAU	N / A for Pkg Type	-55 to 125	CD74AC161E	Samples
CD74AC161M96	LIFEBUY	SOIC	D	16	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	AC161M	

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

PACKAGE OPTION ADDENDUM

www.ti.com 18-Nov-2023

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF CD54AC161, CD74AC161:

• Catalog : CD74AC161

Military: CD54AC161

NOTE: Qualified Version Definitions:

• Catalog - TI's standard catalog product

• Military - QML certified for Military and Defense Applications

PACKAGE MATERIALS INFORMATION

www.ti.com 12-May-2023

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device		Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CD74AC161M96	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1

PACKAGE MATERIALS INFORMATION

www.ti.com 12-May-2023



*All dimensions are nominal

	Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ı	CD74AC161M96	SOIC	D	16	2500	340.5	336.1	32.0

PACKAGE MATERIALS INFORMATION

www.ti.com 12-May-2023

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
CD74AC161E	N	PDIP	16	25	506	13.97	11230	4.32
CD74AC161E	N	PDIP	16	25	506	13.97	11230	4.32

D (R-PDS0-G16)

PLASTIC SMALL OUTLINE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AC.



D (R-PDSO-G16)

PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

N (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2023, Texas Instruments Incorporated